VOLUME HANDLER® 1 SALES GUIDE



SPECIFICATIONS		
Part Number	VH10-0LAAA	
Max Liquid Temp - °F (°C)	170 (76.7)	
Max Liquid Pressure – PSIG (BARG)	170 (11.7)	
Control Air Min – PSIG (BARG)	50 (3.4)	
Control Air Max – PSIG (BARG)	130 (9.0)	
Ht – inches (cm)	12 (30.5)	
Width – inches (cm)	10-3/4 (27.3)	
Depth (Inlet/BV) – inches (cm)	11-1/2 (29.2)	
Inlet / Outlet – NPT	1	
Control Air – NPT	1/4	
Balance Line – NPT	1/8	
Max Capacity @ 110 PSI - GPM	6.4 (1454) *	
(kg/hr)	0.4 (1434)	
Weight – LBS (KG)	24.6 (11.2)	

^{*} Varies with pressure/piping


INTRODUCTION

Drain-All No-loss condensate traps provide unique, high quality, energy efficient, reliable product solutions for draining and moving liquids such as: (1) condensate removal from compressed air systems, (2) oils and lubricants from manufacturing or test equipment, and (3) liquids from atmospheric and vacuum systems. Drain-All condensate traps are produced under a certified ISO 9001 Quality Management System to ensure the product exceeds customer expectations.

Drain-All products are industrially robust, require little maintenance and since they do not require any electrical connections, can be easily installed on equipment at any point in a system. The unique design maintains a liquid barrier inside the trap which prevents the escape of costly process gas. As a result, no-loss condensate traps provide energy savings when compared to timer drains and manual valves. These patented devices are backed by an excellent warranty and a strong technical support staff who are available to assist customers in developing engineered solutions for all of their liquid drainage problems.

The Drain-All product line includes a wide array of products, options and accessories which enable customers to customize their particular liquid drainage systems. The Drain-All condensate drains are compatible with all manufactures of compressors, aftercoolers, filters/separators, receivers and dryers.

COMPONENT PARTS DRAWING

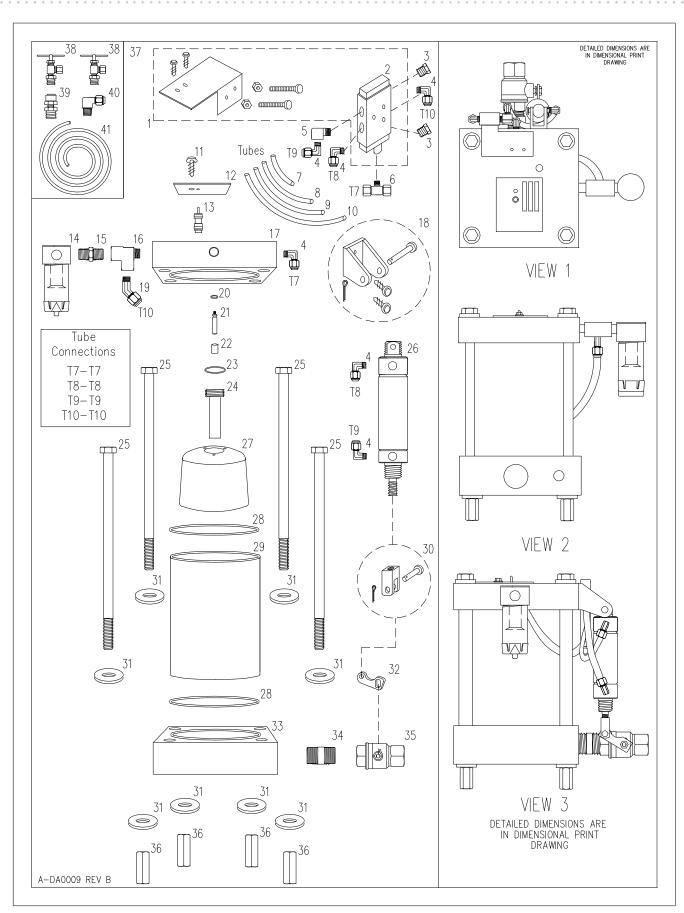

PARTS & MATERIALS OF CONSTRUCTION

CODE	PART#	ITEM	DESCRIPTION/REMARKS	Qty
1	300777	Valve Attachment Kit	Includes:	1
2			(1) 4-Way Valve 700346	
			(1) Valve Attachment Bracket-Stainless Steel	
			(2) Screws-Zinc Plated Steel	
			(2) Screws, Self Tapping- Zinc Plated Steel	
			(2) Nuts-Zinc Plated Steel	
3	301215	Port Screen	Coated Steel Body, Bronze Screen	2
4	301000	Elbow Fitting	Brass	6
5	300128	Elbow Fitting	Brass	1
6	101000	Screen Kit Assembly	Brass Tee, Aluminum disk, (2) SS Screens	1
7	350354	Control Air Tube, 1/4" Dia x 4" L	Nylon	1
8	350350	Control Air Tube, 1/4" Dia x 6" L	Nylon	1
9		Control Air Tube, 1/4" Dia x 7" L	Nylon	1
10	350357	Control Air Tube, 1/4" Dia x 10" L	Nylon	1
11	302500	Screw, Self-Tapping	Zinc Plated Steel	1
12		Name Plate	Aluminum	1
13	300600	Push to Test Button	Brass	1
14		Control Air Filter Assembly	Aluminum Head, Polycarbonate Bowl, Push Drain	1
15		Hex Nipple	Brass	1
16		Tee Fitting	Brass	1
17	170100	-	Aluminum	1
		Cylinder Mount Kit	Includes:	1
_			(1) Bracket-Aluminum	
			(2) Screws-Zinc Plated Steel	
			(1) Mount Pin-Electroless Nickel Plated Steel	
			(1) Cotter Pin-Stainless Steel	
19	301210	Elbow Fitting	Brass	1
20		Valve Stem O-ring	Viton, Brown	1
21		Valve Stem, 2.235" L	O-ring Seal, Aluminum	1
22		Inner Magnet	Ceramic with Viton Ends and Covering	1
23		Center Tube O-ring	Viton, Brown	1
24		Center Tube, 4.5" L	O-ring Seal, Aluminum	1
25		Hex Bolt	Zinc Plated Steel	4
26		Pneumatic Cylinder, 1.5" Dia	50 - 130 PSI, SS Body and Rod, Alum Ends	1
27	100480		Polyurethane, Bullet Shaped	1
28		Sleeve O-ring	Viton, Brown	2
29		Sleeve, .125" TK	Epoxy Fiberglass, Translucent	1
30		Clevis and Pin Kit	Includes:	1
30	330343	CRVIS direct in Kr	(1) Clevis-Electroless Nickel Plated Steel	1
			(1) Clevis Pin-Electroless Nickel Plated Steel	
			(1) Cotter Pin-Stainless Steel	
31	301570	Washer, 1/2" SAE	Zinc Plated Steel	8
32		Control Lever	Stainless Steel for 1" NPT Ball Valve	1
33	170210		6061-T6 Aluminum	1
34		Hex Nipple, 1" NPT, 2" L	Stainless Steel	1
35		Heavy Duty Ball Valve, 1" NPT	Double O-ring Viton Stem Seals, Nickel Plated Brass	1
36		Coupling Nut, 1/2" - 13 x 1-1/4" L	Zinc Plated Steel	4
37		Installation Kit	Includes:	1
38	301130	mistaliation Nit	(2) Needle Valves-Brass	1
			(2) Needle Valves-Brass (1) Straight Fitting-Brass	
			CLEARAIGH CHUIS-DIASS	1
39 40			(1) Elbow Fitting-Brass	<u> </u>

DIMENSIONAL PRINT

