

# CaterTemp® Plus Thermometer

robust, waterproof & salt resistant

- extruded aluminium case for superior durability
- supplied complete with food penetration probe
- waterproof case offering IP66/67 protection
- rubber bumper seals for impact resistance

The CaterTemp Plus hand held thermometer is housed in a robust extruded aluminium waterproof case, offering IP66/67 protection, with a white anti-bacterial/salt resistant powder coated finish. The instrument incorporates the latest microprocessor technology with improved durability, designed for reliability and ease of use in day-to-day catering and food processing applications.

The CaterTemp Plus thermometer measures temperature over the range of -49.9 to 299.9 °C with a 0.1 °C resolution. The instrument features a large, easy to read, LCD display with open circuit and low battery indication. The unit is powered by a 9 volt PP3 battery which gives the thermometer approximately 5000 hours continuous use.

The on/off button is conveniently located at the front of the instrument as is the display hold facility. The CaterTemp Plus thermometer incorporates a secure battery compartment with a waterproof cover.

Each CaterTemp Plus thermometer is supplied with a permanently attached, water resistant, heavy duty, food penetration probe with a Ø3.3 x 130 mm stainless steel stem and one metre PU coiled lead. The probe is both strong, versatile and suitable for a variety of applications including liquids, semi-solids and granular materials.

## colour-coded rubber bumper seals


The CaterTemp Plus thermometer is available with colour-coded rubber bumper seals that can help avoid cross-contamination - see below

## optional accessories

- acrylic wall bracket - screws *not supplied* (832-150)
- protective black PVC boot (830-242)
- anti-bacterial wipes - see page 37



● blue seal - ideal for raw fish & shellfish

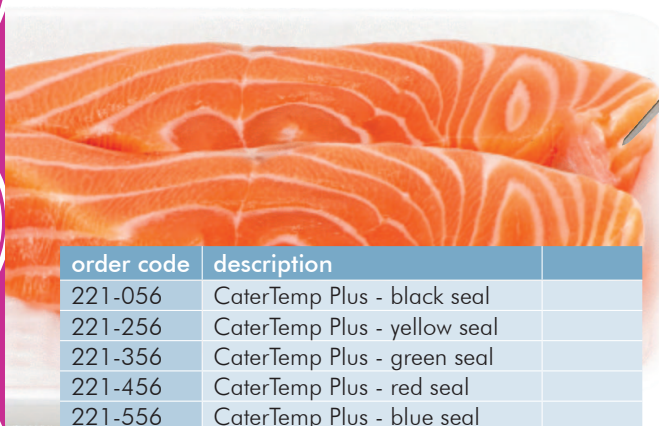

order code	description
221-056	CaterTemp Plus - black seal
221-256	CaterTemp Plus - yellow seal
221-356	CaterTemp Plus - green seal
221-456	CaterTemp Plus - red seal
221-556	CaterTemp Plus - blue seal
830-242	protective PVC boot - black
832-150	acrylic wall bracket



specification	CaterTemp Plus
range	-49.9 to 299.9 °C
resolution	0.1 °C
accuracy	±0.4 °C ±1 digit
battery & life	9 volt PP3 alkaline - 5000 hours
sensor type	K thermocouple
display	12 mm LCD
dimensions	35 x 60 x 115 mm
weight	244 grams

*FREE traceable certificate of calibration included*



**Ross Brown Sales Pty Ltd**

ABN 28 000 690 362  
 Phone: 612 9899 2744 Fax: 612 9899 4233  
 Email: [sales@rossbrownsales.com.au](mailto:sales@rossbrownsales.com.au)  
 Web: [www.rossbrownsales.com.au](http://www.rossbrownsales.com.au)