




63mm Stainless Steel Pressure Gauge

Model: P252-2

Case and bezel material:	304 stainless steel liquid fillable
Connection:	316 Stainless steel
Bourdon tube material:	316 Stainless steel
Blowout protection:	rubber plug on the top
Over Range Protection:	130% of full scale
Working temperature:	Ambient = -40~60° C, Process = +200° C
Dial:	dual scale, black kPa, red psi on white dial
Ranges:	-100~0 kPa to 0~100000 kPa
Connection:	¼" NPT center back mount
Window:	glass lens
Surge protection:	internal restrictor
Movement:	304 Stainless steel
Pointer:	standard non-adjustable
Accuracy:	1.6% of full scale
Protection Rating:	IP65

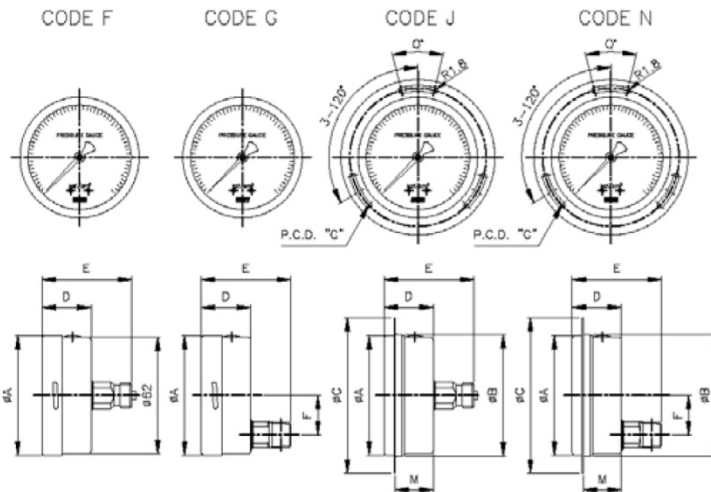

Dimensions in mm

Dial Size	Available Code	A	B	C	D	E	F	G	M	Q
63mm	F	63.7			33	57				
	G	63.7			33	59	13			
	J	63.7	66	86	33	57		75	28	15
	N	63.7	66.2	86	33	57	13	75	28	15

Range (in kPa)	Centre Back Mount P/N	Range (in kPa)	Centre Back Mount P/N	Accessories
-100-0	1369208	0-2500	1369236	Front Flange P/N: 1369998
-100/+150	On request	0-4000	1369242	
-100/+300	On request	0-6000	On request	
-100/+500	On request	0-8000	1369258	Glycerine Filling P/N: 1369999
-100/+900	On request	0-10000	1369260	
-100/+1500	On request	0-16000	1369262	Adjustable Restrictor ¼" NPT M & F P/N: 2911133
0-100	1369218	0-25000	1369264	
0-250	1369222	0-40000	1369266	
0-400	1369224	0-60000	On request	
0-600	1369226	0-80000	On request	
0-800	1369228	0-100000	On request	
0-1000	1369230			
0-1600	1369234			
Weight gms	200	Add 70 gms for glycerine filling		

Revision: 0115